




Türenhandbuch » Funktionstüren » Schallschutz » Türblatt + Holzzarge (1-flg.)  
 » sturzhoch (Typ 1) » stumpf » SSK1 (Rw=32dB) VS1/40-LA BA S

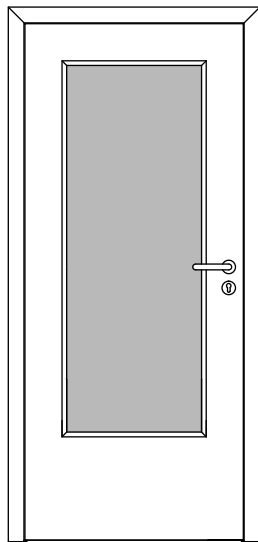

201-104-102-100\_Ansicht.dwg

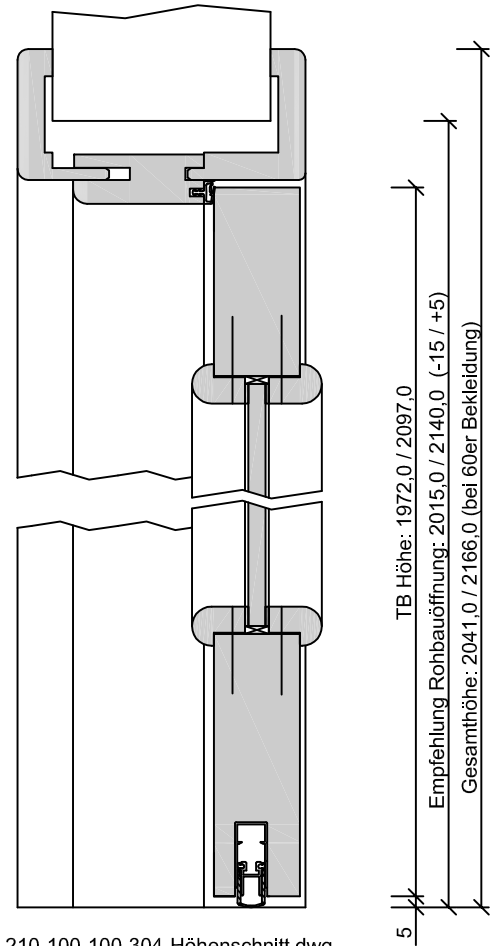

210-100-100-304-Höhenschnitt.dwg

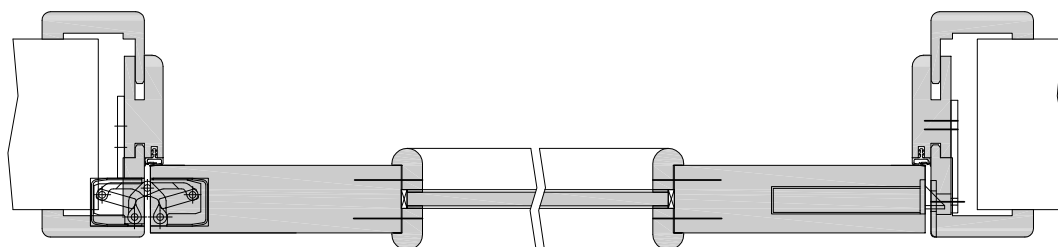

TB Breite: 584,0 / 709,0 / 834,0 / 959,0  
 Empfehlung Rohbauöffnung: 645,0 / 770,0 / 895,0 / 1020,0 (-10 / +20)  
 Gesamtbreite: 711,0 / 836,0 / 961,0 / 1086,0 (bei 60er Bekleidung)

220-800-103-100-Querschnitt.dwg

