

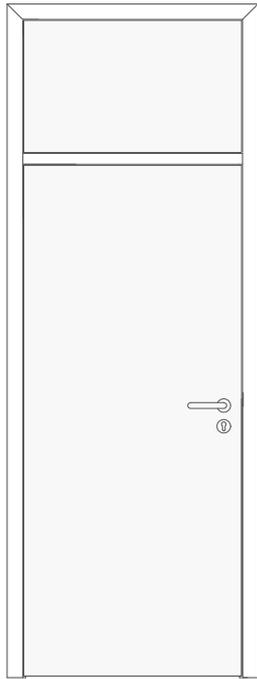


Türenhandbuch » Funktionstüren » Schallschutz » Türblatt + Holzarge (1-flg.)  
 » mit Oberblende (Typ 30/31) » stumpf » SSK3 (Rw=42dB) SD2/46 BA S

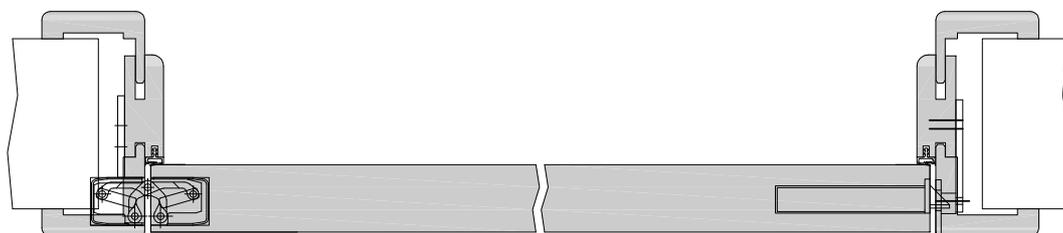

G-A-SD-TB-HZ-1FLG-HZ-OBMKMQ-STU-SD.dwg

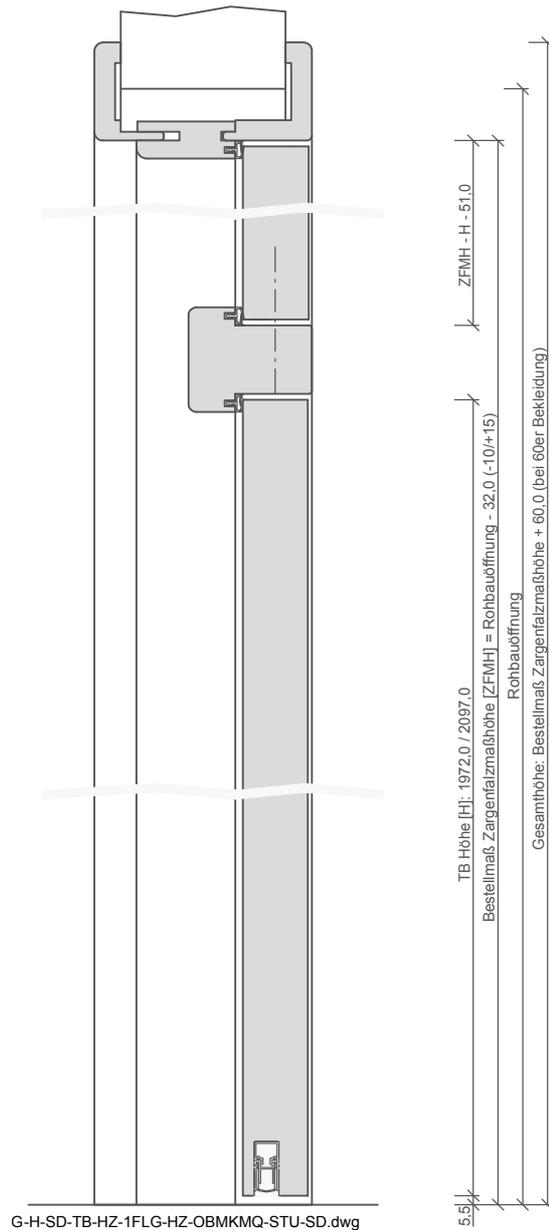

TB Breite: 584,0 / 709,0 / 834,0 / 959,0  
 Empfehlung Rohbauöffnung: 645,0 / 770,0 / 895,0 / 1020,0 (-10 / +20)  
 Gesamtbreite: 711,0 / 836,0 / 961,0 / 1086,0 (bei 60er Bekleidung)

200-800-103-100-Querschnitt.dwg

