



600-102-402-301\_Ansicht.tcd

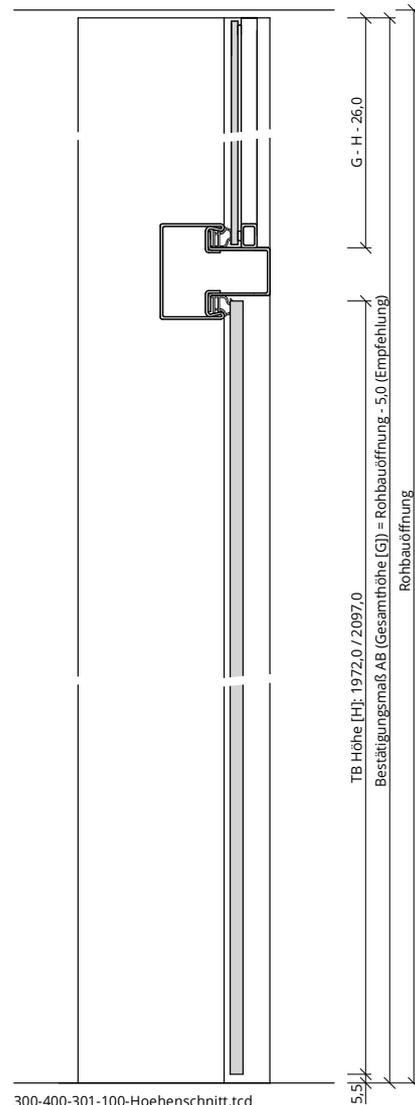

300-400-301-100-Hoehenschnitt.tcd

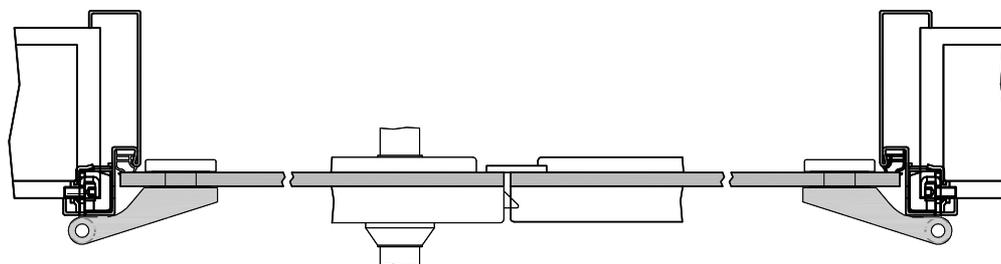

Standflügelbreite: 584,0 / 709,0 / 834,0 / 959,0 | Gehflügelbreite: 584,0 / 709,0 / 834,0 / 959,0

TB Breite: 1172,0 / 1422,0 / 1672,0 / 1922,0

Empfehlung Rohbauöffnung: 1258,0 / 1508,0 / 1758,0 / 2008,0 (-10 / +10)

Gesamtbreite: 1240,0 / 1490,0 / 1740,0 / 1990,0 (bei 30er Spiegelbreite)

600-401-401-100-Querschnitt.dwg

