

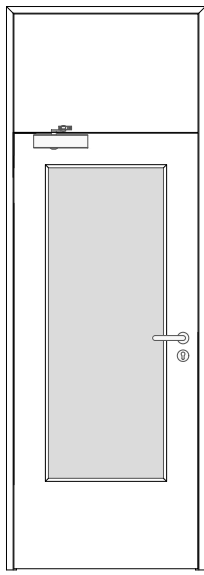


Türenhandbuch » Funktionstüren » Rauchschutz » Türblatt + Stahlzarge (1-flg.) » mit Oberblende (Typ 30/31) » stumpf » RD1-VS3/46-LA BA S

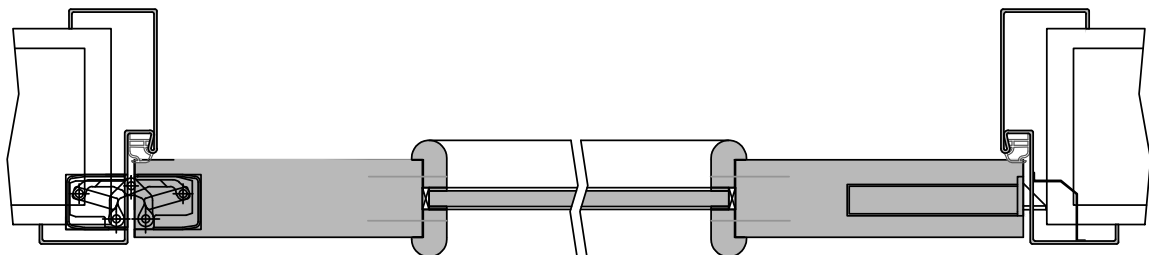

A\_RD\_TB-ST-1FLG\_OBOKMQ\_ε

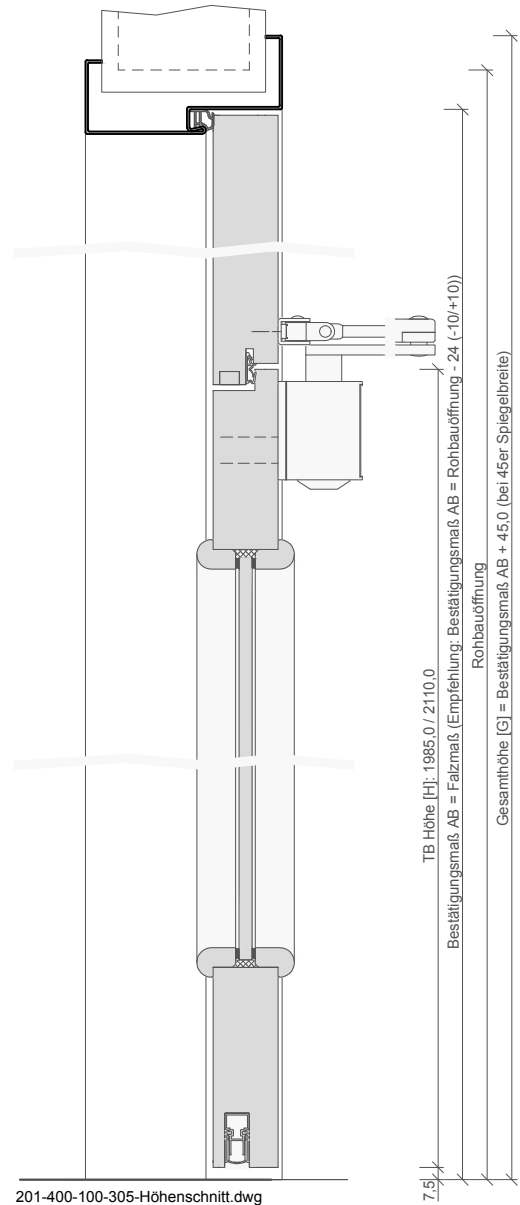

TB Breite: 584,0 / 709,0 / 834,0 / 959,0  
 Empfehlung Rohbauöffnung: 635,0 / 760,0 / 885,0 / 1010,0 (-10 / +10)  
 Gesamtbreite: 681,0 / 806,0 / 931,0 / 1056,0 (bei 45er Spiegelbreite)

201-800-400-100-Querschnitt.dwg

